

NEW PRODUCT RELEASE

FF2448-28 Foam Filled Float Drum

Den Hartog Industries is proud to expand its line of float drums. The product is designed as a foam filled dock float. Float top and bottom are ribbed for strength. Sidewalls are ribbed at each connection point for strength. Foam filled products are certified annually by IMANNA Laboratories in accordance to industry standards.



FEATURES:

- Furnished with one 3/8" NPT plug for thermal ventilation when out of water
- A nominal wall thickness of 0.150" and a minimum thickness of 0.125"
- 8 mounting slots for attachment.
- Foam fill is expanded Polystyrene (EPS) with a density of 1 lb/cubic foot. Polystyrene is CFC free.
- Encasement is produced from Medium Density Polyethylene
- Standard color is black.
- Maximum support buoyancy of foam filled float is 979 lbs.

SPECIFICATIONS:

Overall Float Dimensions: 24" wide x 48" long x 28" tall

Shipping Weight: 55 lbs.






March 2025



Warning: Cancer and Reproductive Harm.
Www.p65Warnings.ca.gov

DEN HARTOG INDUSTRIES, INC.
 Copyright: All information furnished within this document, electronic file or design correspondence is the property of Den Hartog Industries, Inc. and shall not be used, disclosed to others or copied without the expressed written consent of Den Hartog Industries, Inc.

2448-28

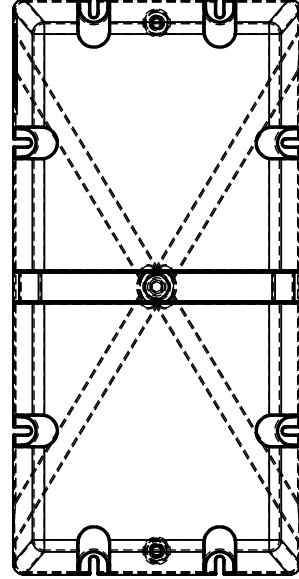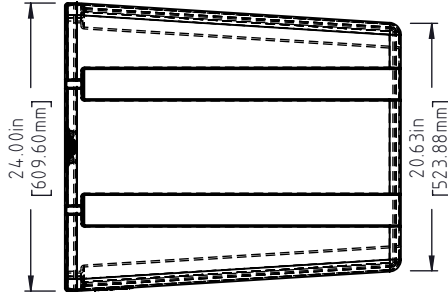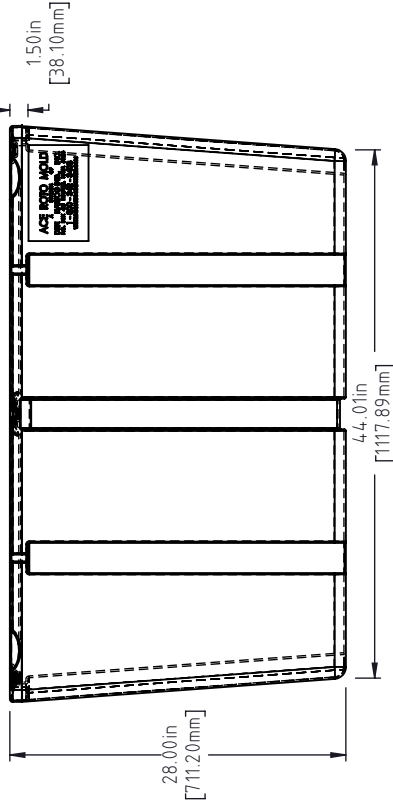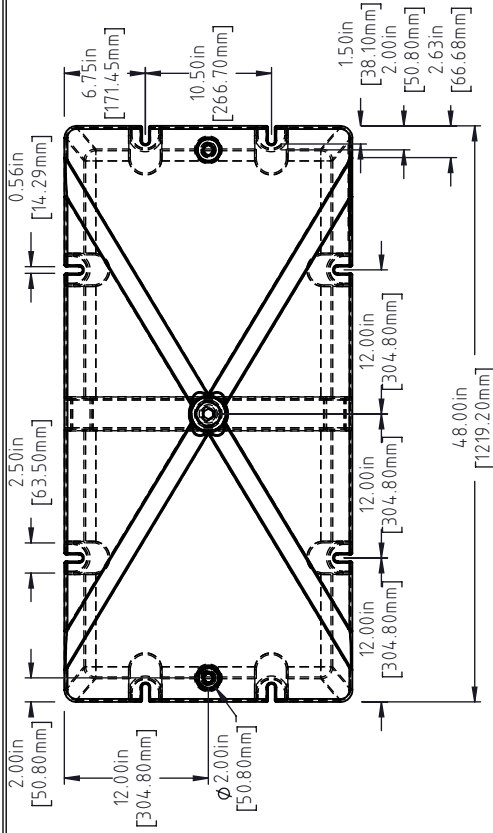

NOTE: BUOYANCY: 979.1 LBS. (444.11 KG)

| REV. | DESCRIPTION | BY | DATE | CCN |
|------|---|----|------|-----|
| | ALL DIMENSIONS ARE IN DECIMAL INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED | | | |
| | POLYETHYLENE ±1% @ 68°F | | | |
| | METAL DECIMAL ± .125" FRACTION ± 1/4" ANGLE ± 1° | | | |
| | THIRD ANGLE PROJECTION ANSI 14.5W | | | |

| | |
|------------------|---------------------|
| DRAWN / DATE | ADH 10/28/2024 |
| APPRD. / DATE | BES 11/17/2024 |
| SHOT WEIGHT: | 39 LBS. (17.69 KG.) |
| SHIPPING WEIGHT: | SEE NOTES |
| FINISH: | |

| | |
|-----------|---|
| MATERIAL: | POLYETHYLENE |
| NOTES: | 1.) AF 39 LBS. (17.69 KG.) 2.) FF 55 LBS. (24.95 KG.) NOMINAL WALL THICKNESS: 0.150 IN (3.81 mm) |

| | |
|-------------|--------------------|
| DESCRIPTION | 24 X 48 X 28 FLOAT |
| SCALE | N.S. |
| PART NO. | 2448-28 |

Den Hartog INDUSTRIES, INC.
 Ace Roto-Mold • Injection Molding • Blow Molding • Sowjoy
 4010 HOSPERS DRIVE S. BOX 425, HOSPERS, IOWA 51238-0425